



Light Panel Modification for HTH Quad Sign

What You'll Need:





Modified Lighting Panel (Included)
Package of Hillman Pop Toggles (Included)
Utility Knife
Phillips Screwdriver
Power Drill

Cut along edge of plate

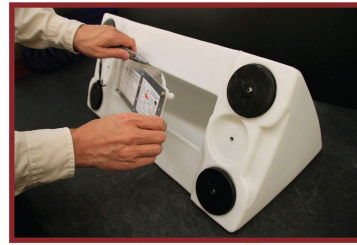

1 Remove metal plate by cutting the sign along the perimeter of the plate. **Be careful not to cut any interior wiring.**

Drill

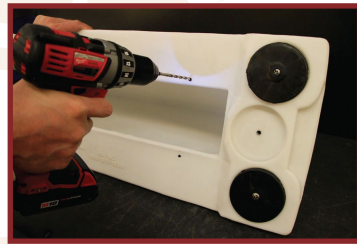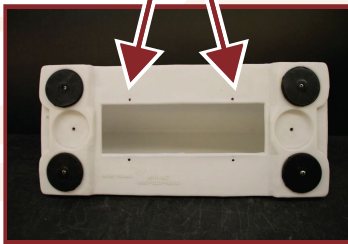

2 Position the new light panel on the sign and mark four dots using the four pre-cut holes on the panel as a template. Remove the panel and drill through the sign on the markings.



3 Fold the wings of the anchor completely inward and insert into the drilled hole until flush. Insert the yellow pin into the anchor to expand anchor wings inside of the sign.



4 Plug new light panel into the pig-tail located inside of the sign. With the anchors in place and expanded, replace panel over the opening, aligning the pre-cut holes with anchors and secure to the sign with screws.